




Type : UI Cores

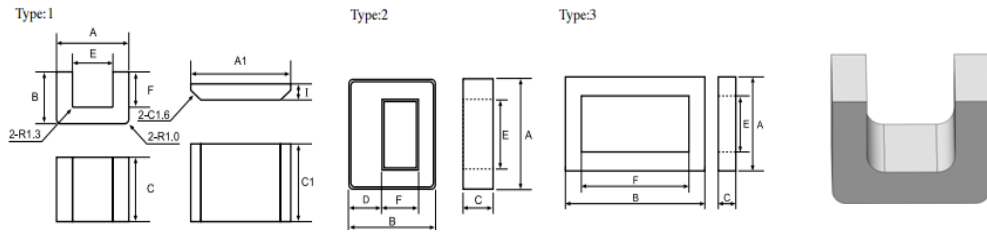

规格 Type	尺寸Dimensions (mm)									图号 Fig.
	A	B	C	D	E	F	A1	C1	I	
UI-11.4-10.20-8.10	11.40 ± 0.30	8.10 ± 0.20	10.20 ± 0.20	-	6.40 ± 0.30	5.60 ± 0.20	15.90 ± 0.30	12.10 ± 0.30	2.50 ± 0.10	1
UT-8.00-2.00-16.00	8.00 ± 0.10	16.00 ± 0.25	2.00 ± 0.10	-	4.00 ± 0.10	12.00min	-	-	-	3
UT-20.6-4.60-14.10	20.60 ± 0.30	14.10 ± 0.25	4.60 ± 0.20	4.10 ± 0.20	15.70min	7.35min	-	-	-	2
UT-25.6-5.20-17.60	25.60 ± 0.40	17.60 ± 0.30	5.20 ± 0.25	5.20 ± 0.15	19.30min	8.70min	-	-	-	2
UT-30.0-6.40-19.80	30.00 ± 0.40	19.80 ± 0.30	6.40 ± 0.25	6.40 ± 0.15	22.40min	8.90min	-	-	-	2

规格 Type	磁芯参数					图号 Fig.
	C1(mm)	Le(mm)	Ae (mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	Wt(g/set)	
UI-11.4-10.20-8.10	1.25	31.85	25.5	812.27	4.9	1
UT-8.00-2.00-16.00	3.79	38.28	4	153.12	0.76	3
UT-20.6-4.60-14.10	4.11	53	13	688	3.76	2
UT-25.6-5.20-17.60	3.77	68	18	1203	5.85	2
UT-30.0-6.40-19.80	2.85	77	27	2068	11.05	2